

525,147

Rec'd PCT/PTO 16 FEB 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)


PCT

(10) International Publication Number
WO 2004/017090 A1

- (51) International Patent Classification⁷: **G01S 3/02, H01Q 3/26**
- (21) International Application Number: **PCT/NL2002/000552**
- (22) International Filing Date: 16 August 2002 (16.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **STICHTING ASTRON [NL/NL]; Oude Hoogeveense Dijk 4, NL-7991 PD Dwingeloo (NL).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BOONSTRA, Albert, Jan [NL/NL]; Wagnerlaan 17, 9402 SG Assen (NL). VAN DER VEEN, Alle, Jan [NL/NL]; Kantoorgeacht 21, 2611 PE Delft (NL).**
- (74) Agent: **PRINS, A., W.; Vereenigde, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).**
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,

[Continued on next page]

(54) Title: CALIBRATION METHOD, DEVICE AND COMPUTER PROGRAM

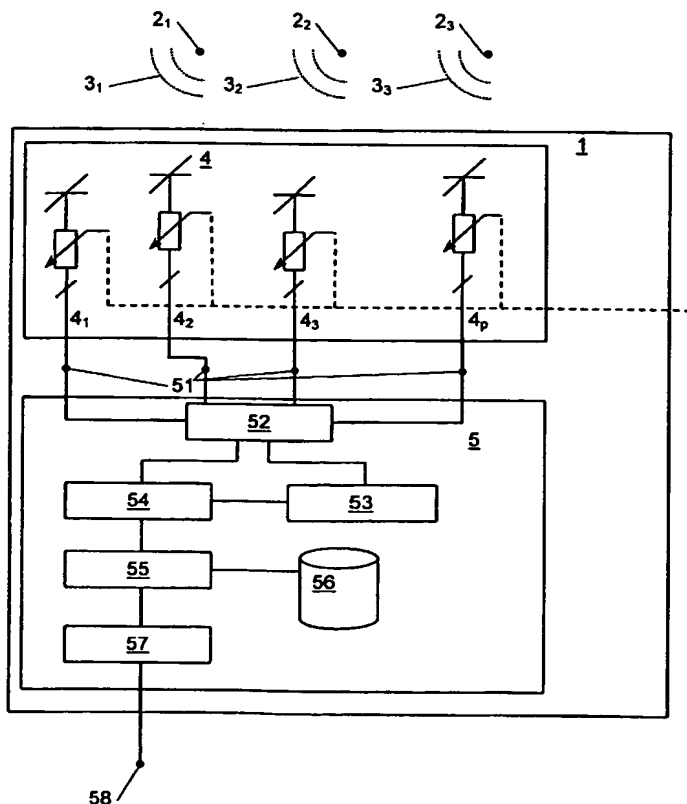

(57) Abstract: A method for calibrating parameters of sensor elements in a sensor array. The method comprises receiving an output signal of at least two sensor elements signal in reaction to an input signal from a signal source; estimating a cross-correlation between the output signals of at least two of said sensor elements; and optimising a difference between the estimated cross-correlation and a cross-correlation model; and thereby estimating said parameters from the optimised difference. A cross-correlation model is used as represented by the mathematical equation: $R = G B G^H + D$

WO 2004/017090 A1